




- Compact size
- 25 mm LCD backlit display
- Precision: +/- 0.03% on MAX
- 5-key waterproof keypad
- Sturdy case in oven-fire painted steel
- Infrared remote control for up to 8m distance use
- Power supply through 4 AA batteries
- Programmable digital filter and auto switch-off
- RS232 serial port on RJ11 connector
- Protective transport case

### Main Functions:

- High resolution display x 10
- Precision weighing with temporary recalibration via a sample weight (for internal factory use)
- Net/Gross
- Lb to Kg converter
- Free conversion factor (for meter and litre counters etc.)
- Weight totalizer
- Formulizer
- +/- controller with quick target and threshold input
- Percentage weighing
- Percentage batching with programmable target
- Piece counter
- Hold
- Two-speed filling/batching with reset upon starting (with optional DFIO)
- PEAK. detection of weight peaks

### Technical Data

Capacity (t)	0,3/0,6/1,5	1,5	0,6/1,5/3,0	3,0	1,5/3,0/6,0	6,0	3,0/6,0/9,5	9,0
Readability(Kg)	0,1/0,2/0,5	0,5	0,2/0,5/1	1	0,5/1/2	2	1/2/5	5
Certification 	-	+	-	+	-	+	-	+
Tare range	100%							
Display	25mm LCD backlit display							
Structure	Sturdy case in oven-fire painted steel							
Transport case dimensions(mm)	175x480x390							
Gross Weight(Kg)	8		10		11		15	
Net Weight (Kg)	11		14		15		18	
Power	4 AA batteries							
Operating Temperature	-10°C /+40°C							

**FOBITEC – FOTIADIS**

**DA9 Industrial Area of Sindos Thessaloniki 57022 GREECE P.O.Box 1217**



tel. 0030 2310 795686 fax. 0030 2310 795687

web : [www.fobitec.com](http://www.fobitec.com)



e-mail : [info@fobitec.gr](mailto:info@fobitec.gr)

[www.youtube.com/fobitec](http://www.youtube.com/fobitec)

**MCWNT1-3**

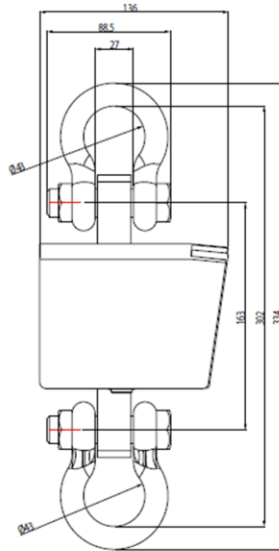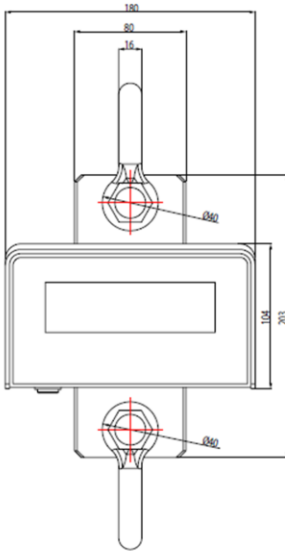

**MCWNT3-3 / MCWNT6-3**

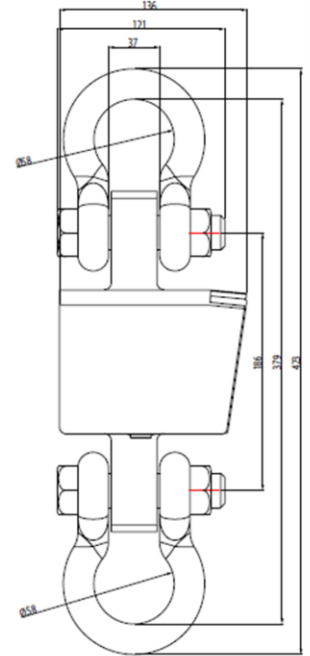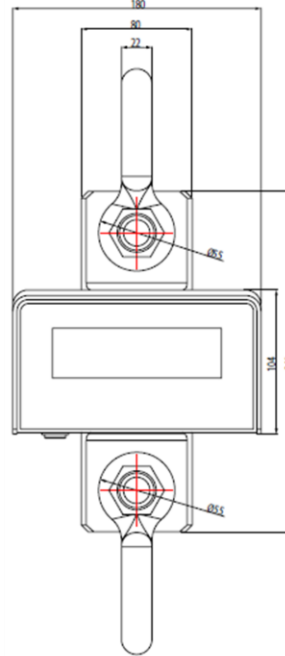

**MCWNT9-3**

